

AP-16 Semi-Automatic Strapping Machine



FEATURES:

- Standard accessory, its advantage is stable quality, durable material, and easy maintenance.
- Special design-Control PP strap cooling time. It can make the PP strap to fasten well in any time.
- "Electricity-saving" device, the motor automatically stops running after 60 seconds pause to reduce the regular mechanical wear and to prolong the machine's life.
- The advanced P.C.B microchip circuit board control system, less malfunction and easy maintenance.
- Durable electro-magnetic clutch transmission means lesser mechanical wear and noise pollution.
- New heater plate design improves warm-up-time, welding speed and increase work efficiency.
- Installing an auxiliary feed switch and cut switch at the control panel makes you operate more conveniently.




Height can be adjusted. Each hole is 14 mm, one section. If locked 2 screws, can increase the height 70mm. If lock 1 screw, can increase



If the machine is with outside tension, then the model number is PW-616HS, PW-616LS, PW-616SLS

the height 140mm.

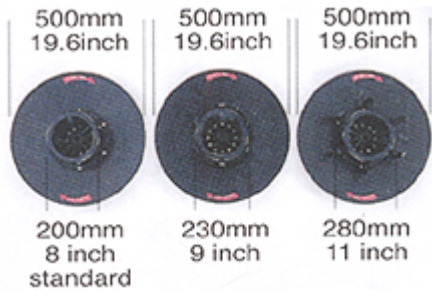

(For PW-616H only)

Standard dispenser inside dia. is 200mm. If need dia. 230 or 280mm, the inner plates required.



Legs and dispensers are disassembled to save transportation costs. 3 units packed in one pallet. 126 units loaded in a 20' feet container.

SPECIFICATIONS:

Model	AP-16	AP-16L	AP-16SL
Power supply	1 Ø AC110,220V(50,60Hz), 1/4HP		
Strap width	6,9,12,15 mm (adjustable)		
Tension strength	15~50kgs		
Strapping speed	2.0 sec./strap		
Min. package size	60mm		
Max. package size	Any size		
Dimension (LxWxH) (mm)	910x580x750	1460x580x480	1460x580x330
N.W.	100kgs	90kgs	80kgs
G.W.	120kgs	110kgs	90kgs
Packing size (LxWxH) (mm)	956x626x914	Machine: 956x626x992 Dispenser:956x626x595	Machine: 956x626x842 Dispenser:956x626x443

Note: Specifications subject to change without notice.